



DRAWING NUMBER
AMX-CB-02272

DO NOT SCALE

ISS	DATE	CHANGE	APPROVAL	ZONE
1.00	6.11.98	PRODUCTION C/N 8354		
1.01	6.07.99	C/N9350		
1.02	12.02.2003	WWS C/N 00006		

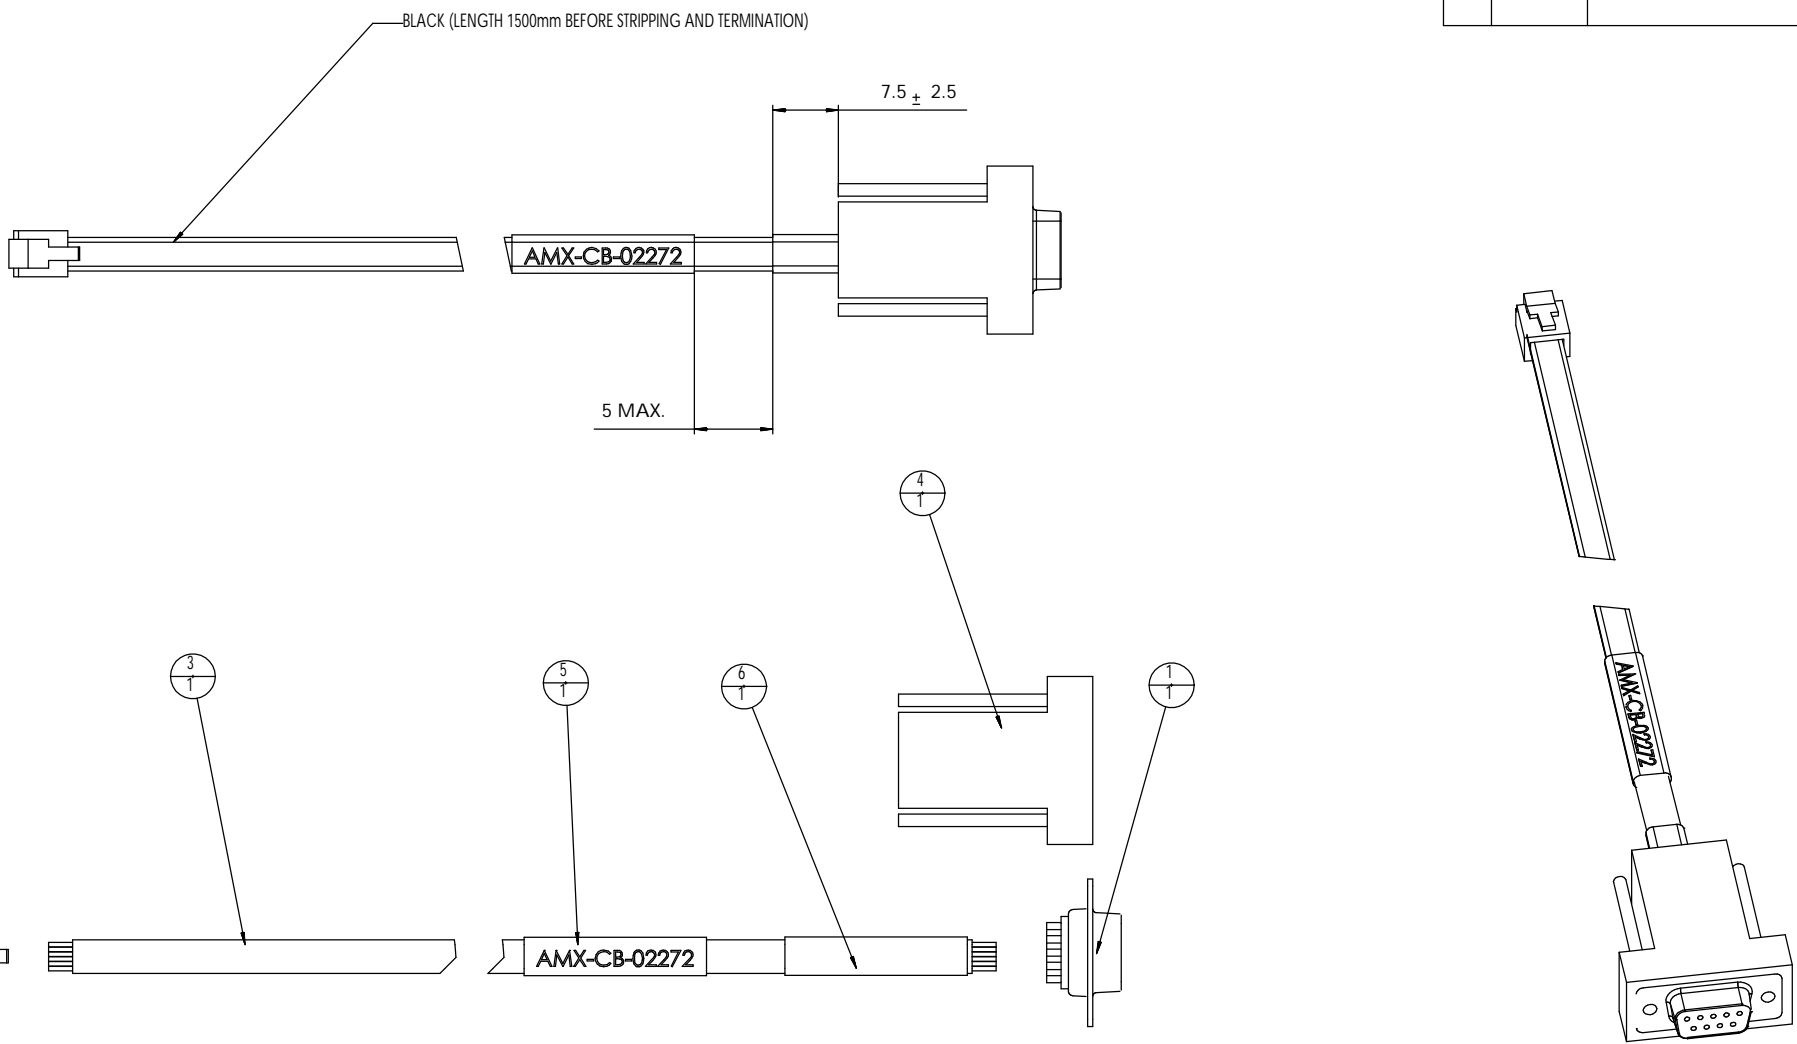

CONNECTOR WIRING

RJ12 PIN#	SIGNAL	SIGNAL	D9 FEMALE PIN#
1	RTS	CTS	8
2	DTR	DCD	1
3	TX	RX	2
4	RX	TX	3
5	GND	GND	5
6	CTS	RTS	7
		DSR	6
		N/C	4
		N/C	9

ITEM NO.	QTY.	SYMIX	DESCRIPTION	SUPPLIER	PART NO.	NOTES
1	1		D9 FEMALE CONNECTOR			
2	1		RJ12(6P6C) MODULAR PLUG			
3	1		6-CORE (6x7/0.16 PACW) FLAT TELEPHONE CABLE BLACK			
4	1		D9 BLACK BACKSHELL WITH INTERNAL CABLE CLAMP AND LONG THUMBSCREWS			
5	1		CABLE MARKING LABEL (W/TEXT 'AMX-CB-02272')	BRADY	WML-517-292	
6	1		PVC STRAIN RELIEF SLEEVE			

TOLERANCES	DIMENSIONS IN: mm	DRAWN T. SLUSARCZYK	Westel Wireless Systems Pty Ltd <small>A.C.N. 054 645 000 LEVEL 13, 15 BLUE STREET, NORTH SYDNEY, NSW, AUSTRALIA</small>	
LINEAR ±0.50	DRAWING PRACTICE AS 1100	CHECKED	TITLE DMR PROGRAMMING CABLE SET	
HOLE CENTRES ±0.20		PASSED	CONTRACTORS REF. NUMBER DCCM 71599	
HOLE DIAMETERS ±0.10	FINISH	APPROVED	DRAWING NUMBER AMX-CB-02272	SHEET SIZE A2
ANGULAR ±0.5°	SECURITY CLASSIFICATION UNCLASSIFIED		SHEET 1 OF 1	
ALL HOLE DIAMETERS STATED ARE FINISHED SIZES AFTER PLATING (IF APPLICABLE)	TSC	DATE APPROVED		
UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE PER TABLE				

FILE: a2sheet.dwg (Nov 96)

400